



**MITSUBISHI
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better

**Simple yet Powerful —
It's the Center of Attention.**



- Newly designed compact body
- Various features for easy yet impressive presentation

XL5U/SL4SU

XGA/1700 lm

SVGA/1700 lm

Great Features in Compact Body

- 5000Hrs life Lamp (low mode)
- Anti-Theft Password
- Short Throw Lens

Other Features

- sRGB • Natural Color Matrix™ • Line Doubler
- Versatile Input Terminals • 3-mode Gamma Correction
- User Logo Function • Digital Expanded Zoom




Specifications

Model	XL5U	SL4SU
Display technology	0.7" Polysilicon panel x 3	0.7" Polysilicon panel x 3
Resolution	1024 x 768 (total 2,359,296 pixels), 600 video lines	800 x 600 (total 1,440,000 pixels), 600 video lines
Brightness	1700 lm	1700 lm
Color	16,770,000 colours	16,770,000 colours
Zoom / focus	Manual control (zoom ratio 1.2:1)	Manual control (zoom ratio 1.2:1)
Picture size	40" ~ 300" (100" = 3.2m)	40" ~ 300" (100" = 3.2m)
Source lamp	200W / 2000hrs (normal mode), 160W / 5000hrs (low mode)	180W / 2000hrs (normal mode), 160W / 5000hrs (low mode)
Computer compatibility	VGA® ~ SXGA® (640 x 400 ~ 1280 x 1024) True: 1024 x 768, Sync on green available	VGA® ~ XGA® (640 x 400 ~ 1024 x 768) True: 800 x 600, Sync on green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) SECAM / PAL 60 / Component Video (DVD / HDTV) (480i, 576i, 480p, 576p, 720p, 1080i), SCART (RGB + 1V sync)	NTSC / NTSC 4.43 / PAL (including PAL-M, N) SECAM / PAL 60 / Component Video (DVD / HDTV) (480i, 576i, 480p, 576p, 720p, 1080i), SCART (RGB + 1V sync)
Input terminals	PC: mini D-sub 15 pin x 1, Video: RCA + S-Video x 1, Audio: RCA (L, R) x 1	PC: mini D-sub 15 pin x 1, Video: RCA + S-Video x 1, Audio: RCA (L, R) x 1
Output terminals	RGB: mini D-sub 15 pin x 1	RGB: mini D-sub 15 pin x 1
Communication terminals	RS-232C x 1 (8pin), mouse terminal for USB	RS-232C x 1 (8pin), mouse terminal for USB
Audio speaker	2 W Mono	2 W Mono
Dimensions (W x H x D)	275 x 70 x 261 mm / 10.8" x 2.8" x 10.3" (Excluding all protrusions)	275 x 70 x 261 mm / 10.8" x 2.8" x 10.3" (Excluding all protrusions)
Weight	2.7 kg / 5.9 lbs	2.7 kg / 5.9 lbs
Power supply	AC 100 ~ 240 V / ±10%, 50/60 Hz	AC 100 ~ 240 V / ±10%, 50/60 Hz

* SXGA, XGA and SVGA are registered trademarks of IBM Corporation.* All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Input and Output Terminals

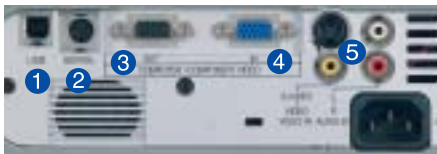

- 1 Mouse terminal for USB
- 2 Serial terminal RS-232C x 1 (8 pin)
- 3 PC/Component Video output (mini D-sub 15 pin)
- 4 PC/Component Video input (mini D-sub 15 pin)
- 5 S-Video/Video/Audio input




VLT-XL5LP
Replacement lamp
for XL5U




VLT-XL8LP
Replacement lamp
for SL4SU

Dimensions (unit: mm, inch)

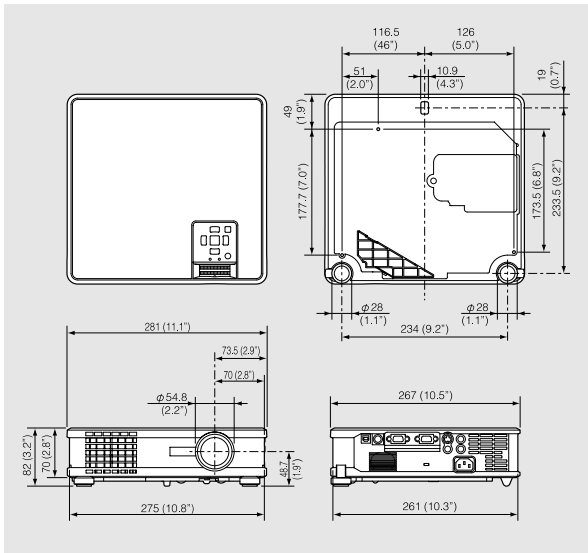

Projection Distance and Screen Size

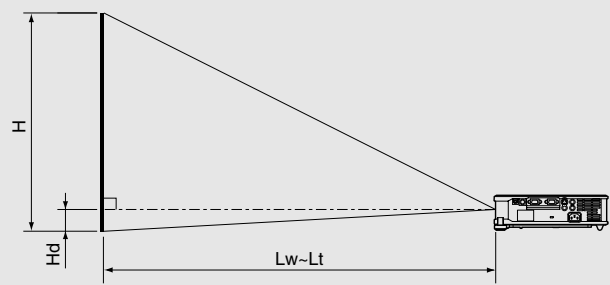

Screen				Distance from screen				Height Projected			
Diagonal Size	Width	Height	Max. Zoom	Min. Zoom	Image(H)						
inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	32	81	24	61	49	1.3	60	1.5	2.4	6.1
60	152	48	122	36	91	75	1.9	91	2.3	3.6	9.1
80	203	64	163	48	122	101	2.6	121	3.1	4.8	12.2
100	254	80	203	60	152	126	3.2	152	3.9	6.0	15.2
150	381	120	305	90	229	191	4.8	229	5.8	9.0	22.9
200	508	160	406	120	305	255	6.5	306	7.8	12.0	30.5
250	635	200	508	150	381	319	8.1	383	9.7	15.0	38.1
300	762	240	610	180	457	383	9.7	—	—	18.0	45.7

MITSUBISHI ELECTRIC CORPORATION
 HEAD OFFICE: MITSUBISHI DENKI BLDG., 2-2-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

For more information about our XL5U/SL4SU projector, visit us at our new URL:

Global.MitsubishiElectric.com/projectors/